

AD-A162 878

INTERACTIVE INFORMATION AND PROCESSING SYSTEMS USED FOR
METEOROLOGICAL SU. (U) EASTERN SPACE AND MISSILE CENTER
PATRICK AFB FL B F BOYD ET AL. 1985 ESNC-TR-85-06


1/1

UNCLASSIFIED

F/G 4/2

NL





MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

UNCLASSIFIED

AD-A162 878

SECURITY CLASSIFICATION OF THIS PAGE

REPORT DOCUMENTATION PAGE

1a. REPORT SECURITY CLASSIFICATION UNCLASSIFIED/UNLIMITED			1b. RESTRICTIVE MARKINGS NONE	
2a. SECURITY CLASSIFICATION AUTHORITY N/A			3. DISTRIBUTION/AVAILABILITY OF REPORT "A"	
2b. DECLASSIFICATION/DOWNGRADING SCHEDULE N/A				
4. PERFORMING ORGANIZATION REPORT NUMBER(S) ESMC-TR-85-06			5. MONITORING ORGANIZATION REPORT NUMBER(S)	
6a. NAME OF PERFORMING ORGANIZATION EASTERN SPACE AND MISSILE CENTER (ESMC)		6b. OFFICE SYMBOL (If applicable) WE	7a. NAME OF MONITORING ORGANIZATION DTIC ELECTE DEC 31 1985	
6c. ADDRESS (City, State and ZIP Code) ESMC/WE PATRICK AIR FORCE BASE, FL 32925			7b. ADDRESS (City, State and ZIP Code)	
8a. NAME OF FUNDING/SPONSORING ORGANIZATION Eastern Space and Missile Center (ESMC)		8b. OFFICE SYMBOL (If applicable)	9. PROCUREMENT INSTRUMENT IDENTIFICATION NUMBER N/A	
8c. ADDRESS (City, State and ZIP Code)			10. SOURCE OF FUNDING NOS.	
			PROGRAM ELEMENT NO.	PROJECT NO.
			TASK NO.	WORK UNIT NO.
11. TITLE (Include Security Classification) Interactive Information and Processing Systems used for Meteorological Support to the Eastern Test Range				
12. PERSONAL AUTHOR(S) Billie F. Boyd and Thomas M. Myers				
13a. TYPE OF REPORT Progress		13b. TIME COVERED FROM 1984 TO 1985		14. DATE OF REPORT (Yr., Mo., Day)
				15. PAGE COUNT 7
16. SUPPLEMENTARY NOTATION				
17. COSATI CODES			18. SUBJECT TERMS (Continue on reverse if necessary and identify by block number)	
FIELD	GROUP	SUB. GR.	Weather Forecasting, Interactive Graphics IBM 4344	
19. ABSTRACT (Continue on reverse if necessary and identify by block number)				
The report details various interactive meteorological systems in use at the Cape Canaveral Forecast Facility (CCFF) to support the Space Shuttle and missile launch operations at the Eastern Test Range (ETR). Weather requirements are discussed and data input/output described.				
20. DISTRIBUTION/AVAILABILITY OF ABSTRACT UNCLASSIFIED/UNLIMITED <input checked="" type="checkbox"/> SAME AS RPT. <input type="checkbox"/> DTIC USERS <input type="checkbox"/>			21. ABSTRACT SECURITY CLASSIFICATION UNCLASSIFIED	
22a. NAME OF RESPONSIBLE INDIVIDUAL Billie F. Boyd, GS-13			22b. TELEPHONE NUMBER (Include Area Code) 305-494-5915	22c. OFFICE SYMBOL WER

INSTRUCTIONS FOR PREPARATION OF REPORT DOCUMENTATION PAGE

GENERAL INFORMATION

The accuracy and completeness of all information provided in the DD Form 1473, especially classification and distribution limitation markings, are the responsibility of the authoring or monitoring DoD activity.

Because the data input on this form will be what others will retrieve from DTIC's bibliographic data base or may determine how the document can be accessed by future users, care should be taken to have the form completed by knowledgeable personnel. For better communication and to facilitate more complete and accurate input from the origination of the form to those processing the data, space has been provided for the name, telephone number and office symbol of the DoD person responsible for the input cited on the form. These are to be noted in Block 22.

All information on the DD Form 1473 should be typed.

Only information appearing on or in the report, or applying specifically to the report in hand should be reported. If there is any doubt, the block should be left blank.

Some of the information on the forms (e.g., title, abstract) will be machine-indexed. The terminology used should describe the content of the report or identify it as precisely as possible for future identification and retrieval.

SPECIAL NOTE: UNCLASSIFIED ABSTRACTS AND TITLES DESCRIBING CLASSIFIED DOCUMENTS MAY APPEAR SEPARATELY FROM THE DOCUMENTS IN AN UNCLASSIFIED CONTEXT, E.G., IN DTIC ANNOUNCEMENT BULLETINS AND BIBLIOGRAPHIES OR BY ACCESS IN AN UNCLASSIFIED MODE TO THE RDT/E ON-LINE SYSTEM. THIS MUST BE CONSIDERED IN THE PREPARATION AND MARKING OF UNCLASSIFIED ABSTRACTS AND TITLES.

The Defense Technical Information Center (DTIC) is ready to offer assistance to anyone who needs and requests it. Call Data Base Input Division (AUTOVON) 284-7044; Com 202-274-7044.

SPECIFIC BLOCKS

SECURITY CLASSIFICATION OF THE FORM:

In accordance with DoD 5200.1-R, Information Security Program Regulation, Chapter V1 Section 2, paragraph 4-200, classification markings are to be stamped, printed, or written at the tops and bottom of the form in capital letters that are larger than those used in the text of the document. See also DoD 5220.22-M, Industrial Security Manual for Safeguarding Classified Information, Section II, paragraph 11a(2). This form should be nonclassified, if possible.

Block 1.a. Report Security Classification: Designate the highest security classification of the report. (See DoD 5200.00.1-R, Chapters, I, IV, VII, XI, Appendix A).

Block 1.b. Enter the restricted marking or warning notice of the report (e.g., CNWDI, RD, NATO).

Block 2.a. Security Classification Authority: Enter the commonly used markings in accordance with DoD 5200.1-R, Chapter IV, Section 4, paragraph 4-400 and 4-402. Indicate classification authority.

Block 2.b. Declassification/Downgrading Schedule: Indicate specific date or event for declassification or the notation "Originating Agency Determination Required" or "OADR." Also insert (when applicable) downgrade to: _____ on _____, (e.g., "Downgrade to Confidential on 6 July 1983). (See also DoD 5220.22-M, Industrial Security Manual for Safeguarding Classified Information, Appendix II).

NOTE: Entry must be made in Blocks 2.a. and 2.b. except when the original report is unclassified and has never been upgraded.

Block 3. Distribution/Availability Statement of Report: Insert the statement as it appears on the report. If a limited distribution statement is used, the reason must be one of those given by DoD Directive 5200.20, Distribution Statements on Technical Documents. The Distribution Statement should provide for the broadest distribution possible within limits of security and controlling office limitations.

Block 4. Performing Organization Report Number(s): Enter the unique alphanumeric report number(s) assigned by the organization originating or generating the report from its research and whose name appears in Block 6. These numbers should be in accordance with ANSI STD 239.23-74 "American National Standard Technical Report Number." If the Performing Organization is also the Monitoring Agency, enter the report number in Block 4.

Block 5. Monitoring Organization Report Number(s): Enter the unique alphanumeric report number(s) assigned by the Monitoring Agency. This should be a number assigned by a Department of Defense or other government agency and should be in accordance with ANSI STD 239.23-74 "American National Standard Technical Report Number." If the Monitoring Agency is the same as the Performing Organization enter the report number in Block 4 and leave Block 5 blank.

Block 6.a. Performing Organization: For in-house reports, enter the name of the performing activity. For reports prepared under contract or grant, enter the contractor or the grantee who generated the report and identify the appropriate corporate division, school, laboratory, etc., of the author.

Block 6.b. Enter the office symbol of the performing organization.

Block 6.c. Enter the address of the performing organization, list city, state and ZIP code.

Block 7.a. Monitoring Organization — Name: This is the agency responsible for administering or monitoring a project, contract, or grant. If the monitor is also the performing organization, leave Block 7.a. blank. In the case of joint sponsorship, the monitoring organization is determined by advanced agreement. It can be either an office, a group, or a committee representing more than one activity, service or agency.

Block 7.b. Enter the address of the monitoring organization. Include city, state and ZIP code.

Block 8.a. Funding (Sponsoring) Organization — Name: Enter the full official name of the organization under whose immediate funding the document was generated, whether the work was one in-house or by contract. If the Monitoring Organization is the same as the Funding Organization, leave Block 8.a. blank.

Block 8.b. Enter the office symbol of the Funding (Sponsoring) Organization.

Block 8.c. Enter the address of the Funding (Sponsoring) Organization. Include city, state and ZIP code.

Block 9. Procurement Instrument Identification Number (Contract, Grant, or other Funding Instrument): For a contractor or grantee report, enter the complete contract or grant number(s) under which the work was accomplished. Leave this block blank for in-house reports.

Block 10. Source of Funding (Program Element, Project, Task Area, and Work Unit Number(s)): These four data elements relate to the DoD budget structure and provide program and/or administrative identification of the source of support for the work being carried on. Enter the program element, project, task area, work unit number, or their equivalents that identify the principal source of funding for the work required. These codes may be obtained from the applicable DoD forms such as the DD Form 1498 (Research and Technology Work Unit Summary) or from the fund citation of the funding instrument. If this information is not available to the authoring activity, these blocks should be filled in by the responsible DoD Official designated in Block 22. If the report is funded from multiple sources, identify only the Program Element and the Project, Task Area and Work Unit Numbers of the principal contributor.

Block 11. Title and Its Security Classification: Enter the title in Block 11 in initial capital letters exactly as it appears on the report. Titles on all classified reports, whether classified or unclassified, must be immediately followed by the security classification of the title enclosed in parentheses. A report with a classified title should be provided with an unclassified version if it is possible to do so without changing the meaning or obscuring the contents of the report. Use specific, meaningful words that describe the content of the report so that when the title is machine-indexed, the words will contribute useful retrieval terms.

If the report is in a foreign language and the title is given in both English and a foreign language, list the foreign language title first, followed by the English title enclosed in parentheses. If part of the text is in English, list the English title first followed by the foreign language title enclosed in parentheses. If the title is given in more than one foreign language, use a title that reflects the language of the text. If both the text and titles are in a foreign language, the title should be translated, if possible, unless the title is also the name of a foreign periodical. Transliterations of often used foreign alphabets (see Appendix A of MIL-STD-847B) are available from DTIC in document AD-A080 800.

Block 12. Personal Author(s): Give the complete name(s) of the author(s) in this order: last name, first name and middle name. In addition, list the affiliation of the authors if it differs from that of the performing organization.

List all authors. If the document is a compilation of papers, it may be more useful to list the authors with the titles of their papers as a contents note in the abstract in Block 19. If appropriate, the names of editors and compilers may be entered in this block.

Block 13.a. Type of Report: Indicate whether the report is summary, final, annual, progress, interim, etc.

Block 13.b. Period of Time Covered: Enter the inclusive dates (year, month, day) of the period covered, such as the life of a contract in a final contractor report.

Block 14. Date of Report: Enter the year, month, and day, or the year and the month the report was issued as shown on the cover.

Block 15. Page Count: Enter the total number of pages in the report that contain information, including cover, preface, table of contents, distribution lists, partial pages, etc. A chart in the body of the report is counted even if it is unnumbered.

Block 16. Supplementary Notation: Enter useful information about the report in hand, such as: "Prepared in cooperation with . . ." "Translation at (or by) . . ." "Symposium . . ." If there are report numbers for the report which are not noted elsewhere on the form (such as internal series numbers or participating organization report numbers) enter in this block.

Block 17. COSATI Codes: This block provides the subject coverage of the report for announcement and distribution purposes. The categories are to be taken from the "COSATI Subject Category List" (DoD Modified), Oct 65, AD-624 000. A copy is available on request to any organization generating reports for the DoD. At least one entry is required as follows:

Field — to indicate subject coverage of report.

Group — to indicate greater subject specificity of information in the report.

Sub-Group — if specificity greater than that shown by Group is required, use further designation as the numbers after the period (.) in the Group breakdown. Use only the designation provided by AD-624 000.

Example: The subject "Solid Rocket Motors" is Field 21, Group 08, Subgroup 2 page 32, AD-624 000).

Block 18. Subject Terms: These may be descriptors, keywords, posting terms, identifiers, open-ended terms, subject headings, acronyms, code words, or any words or phrases that identify the principal subjects covered in the report, that conform to standard terminology and exact enough to be used as subject index entries. Certain acronyms or "buzz words" may be used if they are recognized by specialists in the field and have a potential for becoming accepted terms. "Laser" and "Reverse Osmosis" were once such terms.

If possible, this set of terms should be selected so that the terms individually and as a group will remain UNCLASSIFIED without losing meaning. However, priority must be given to specifying proper subject terms rather than making the set of terms appear "UNCLASSIFIED". Each term on classified reports must be immediately followed by its security classification, enclosed in parentheses.

For reference on standard terminology the "DTIC Retrieval and Indexing Terminology" DRIT-1979, AD-A068 500, and the DoD "Thesaurus of Engineering and Scientific Terms (TEST) 1968, AD-672 000, may be useful.

Block 19. Abstract: The abstract should be a pithy, brief (*preferably not to exceed 300 words*) factual summary of the most significant information contained in the report. However, since the abstract may be machine-searched, all specific and meaningful words and phrases which express the subject content of the report should be included, even if the word limit is exceeded.

If possible the abstract of a classified report should be unclassified and consist of publicly releasable information (*Unlimited*); but in no instance should the report content description be sacrificed for the security classification.

NOTE: AN UNCLASSIFIED ABSTRACT DESCRIBING A CLASSIFIED DOCUMENT MAY APPEAR SEPARATELY FROM THE DOCUMENT IN AN UNCLASSIFIED CONTEXT, E.G., IN DTIC ANNOUNCEMENT OR BIBLIOGRAPHIC PRODUCTS OR BY ACCESS IN AN UNCLASSIFIED MODE TO THE DEFENSE RDT&E ON-LINE SYSTEM. THIS MUST BE CONSIDERED IN THE PREPARATION AND MARKING OF UNCLASSIFIED ABSTRACTS.

For further information on preparing abstracts, employing scientific symbols, verbalizing, etc., see paragraph 2.1(n) and 2.3(b) in MIL-STD-847B.

Block 20. Distribution/Availability of Abstract: This block must be completed for all reports. Check the applicable statement either "unclassified/unlimited" or "same as report," or if the report is available to DTIC registered users "Abstract available to DTIC users."


Block 21. Abstract Security Classification: To ensure proper safeguarding of information, this block must be completed for all reports to designate the classification level of the entire abstract. For CLASSIFIED abstracts, each paragraph must be preceded by its security classification code in parentheses.

Blocks 22.a.b.c. Give name, telephone number and office symbol respectively of DoD person responsible for the accuracy of the completion of this form.

INTERACTIVE INFORMATION AND PROCESSING SYSTEMS USED FOR
METEOROLOGICAL SUPPORT TO THE EASTERN TEST RANGE

Billie F. Boyd and Lt Col Thomas M. Myers

Office of the Staff Meteorologist
Eastern Space and Missile Center
Patrick Air Force Base, Florida



1. INTRODUCTION

The United States Air Force (USAF) Air Weather Service's Detachment 11 of the 2nd Weather Squadron is tasked to provide meteorological and environmental support to the USAF Eastern Space and Missile Center (ESMC), the National Aeronautics and Space Administration (NASA) Kennedy Space Center (KSC), and the Department of Defense (DOD) Manager for Space Shuttle Support Operations. They provide weather support to the Cape Canaveral Air Force Station (CCAFS), Patrick Air Force Base (PAFB), KSC, and the entire Eastern Test Range (ETR) primarily through the Cape Canaveral Forecast Facility (CCFF). The CCFF is a 24-hour-a-day forecasting and observing operation. As part of its normal support, it provides specialized forecasts for all missile and space launches from the ETR/KSC and weather services for recovery forces. By far, the launch, landing, and ground operations of the Space Shuttle require the most precise weather support. All aspects of Space Shuttle operations are sensitive to some meteorological parameter. As the Shuttle proved itself in its early missions (see Table 1 for number of missions), and became operational with a significant increase in the number of scheduled missions (Table 2), it was evident that weather and weather support would become critical elements in achieving and maintaining the higher launch rate.

TABLE 1

SHUTTLES LAUNCHED BY YEAR

YEAR	TOTAL LAUNCHED
1981	2
1982	3
1983	4
1984	5

TABLE 2

PROJECTED SHUTTLE LAUNCHES BY YEAR

YEAR	TOTAL LAUNCHES
1985	13
1986	17
1987	23
1988	24

To deal with this problem, NASA and the USAF, at the local level, formed a joint Meteorological Systems Modernization Program (MSMP). This group is co-chaired by the Technology Projects Office of the KSC and the Office of the Staff Meteorologist of the ESMC. Part of that modernization effort involved improvements through utilization of interactive information and processing systems. Descriptions of those major systems currently in use are presented as well as a look at possible improvements.

2. THE METEOROLOGICAL INTERACTIVE DATA DISPLAY SYSTEM (MIDDS)

To assist the forecaster with the problems of integrating data from various sources and producing mission support products which use all of the available data in an internally consistent manner, the MIDDS was developed under contract with the Space and Science Engineering Center (SSEC). The MIDDS (Young, 1985) consists of an IBM 4341 computer with appropriate peripherals and workstations in supporting a variation of the Man Computer Interactive Data Access System (McIDAS) software (Suami, 1983). The system provides integration of the data sources available to the CCFF into a single data base where the various types of data can be melded and displayed together for forecaster use. It also provides growth for new data sources and allows for a significant increase in the applications which the forecasters and system users are expected to make after they become more familiar with the power of the system.

2.1 Global Data Bases

The data base consists of two general areas: global and local data. The global is (or will be) received via three sources: real time Geostationary Operational Environmental Satellite (GOES) data (including rapid scan data during critical mission periods), hourly meteorological data via an FAA 604 circuit, and gridded data via the National Weather Service Numerical Meteorological Center's products circuit. The first two are already in-place.

2.2 Local Data Bases

Unique local data sets consist of the following:

2.2.1 Micrometeorological Tower System

The Weather Information Network Display System (WINDS) currently consists of 28 met towers plus instruments on the launch complex towers. These locations are depicted in Figure 1. Sensors are mounted at heights of 30 to 54 feet plus one tower with sensors to 500 feet and two other towers instrumented to 200 feet. The tower sensors provide wind direction and speed, temperature, dew point and atmospheric pressure. Measurements are recorded at six second intervals and averaged to five minute reports.

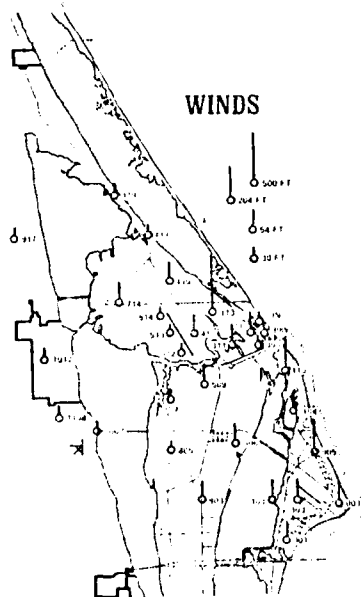


Fig. 1. Location of the Weather Information Network Display System (WINDS) Towers.

2.2.2 Lightning Data

Lightning and lightning potential data are input from two systems. The first system is the Lightning Location and Protection System (LLP). As originally purchased in 1981, it consisted of three medium gain direction finders (DF's). These are now located at Melbourne, North KSC, and Orlando. This gives the system a base line of 37 to 43 miles. A low gain system has since been embedded within the original system. One low gain DF is located at Titusville-Cocoa Airport with the other sharing the medium gain location at North KSC, producing a baseline perpendicular to the Titan Launch Complex 40. To optimize accuracy and reduce background noise, the DF electronics are designed to respond to only those field waveforms characteristic of return strokes in cloud-to-ground flashes (Maier, 1984).

The other lightning information input into the MIDDs is the Launch Pad Lightning Warning System (LPLWS). The LPLWS consists of a network of 34 electric field mills located throughout KSC and CCAFS (Figure 2), and feeds into two primary software routines. The field mills measure the vertical component of the atmospheric potential gradient at ground level and permit the contouring of that information. During lightning activity, the LPLWS program determines which charge center was the source of the lightning activity and determines location and counts the number of flashes. Note that this system does not distinguish between cloud-to-cloud or cloud-to-ground lightning strokes.

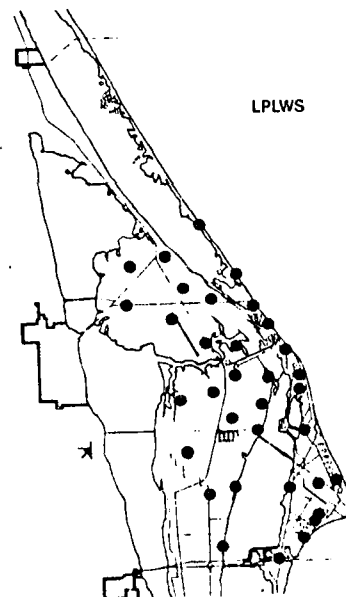


Fig. 2. Location of the Launch Pad Lightning Warning System (LPLWS) Sensors.

Accession For	
NTIS CRA&I	<input checked="" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A-1	



2.2.3 Weather Radar Inputs

Radar data are not yet input to the MIDDS; however, when the system is completed, local radar will be input, with major improvements. Currently a WSR-74C specially modified for C-band and for high density binning, with the antenna located at Patrick Air Force Base (PAFB), has a separate real time remote display in place at the CCFF. The CCFF also has a dial-up communications capability at 2,400 bits per second which is most frequently used to access the National Weather Service (NWS) WSR-74S (S-band) radar at Daytona Beach. The major improvement in radar to be input to the MIDDS will be volumetric scan data from the PAFB radar. This will be added to the MIDDS using techniques developed by the McGill University radar group and will be patterned after their Short-Range Automated Radar Prediction (SHARP) system. This system will send Constant Altitude PPI (CAPPI) scans, arbitrary vertical slices, and short term forecasts of radar echo movements to the MIDDS.

2.2.4 Upper Air Data

Other local data input to the MIDDS are frequent upper air measurements taken for

mission support. These data are input through interfaces with Nova and Cyber computers, and consist of radiosonde, rocketsonde, windsonde, and Jimsphere data.

2.3 Computer System

The heart of the current system (Figure 3), installed in January 1985, is an IBM 4341-M2. It is an intermediate sized computer with eight megabytes of real memory and 16 megabytes of virtual memory. The system as currently configured has 2.5 gigabits of disk storage and four forecaster workstations with supporting equipment. Plans are to upgrade the main computer to an IBM 4381, with the current system becoming a hot spare for redundancy, eliminating a single point failure. Upgrade of the work stations is also in progress, to smart terminals by use of a modified IBM A/T.

The MIDDS software can be divided into four categories of interest to the meteorologist. They are support software, interactive workstation software, meteorological software, and image processing software. The support software includes the ingestors which collect and file data coming into the system in real-time. These monitor the incoming data for

OPERATIONAL SYSTEM*

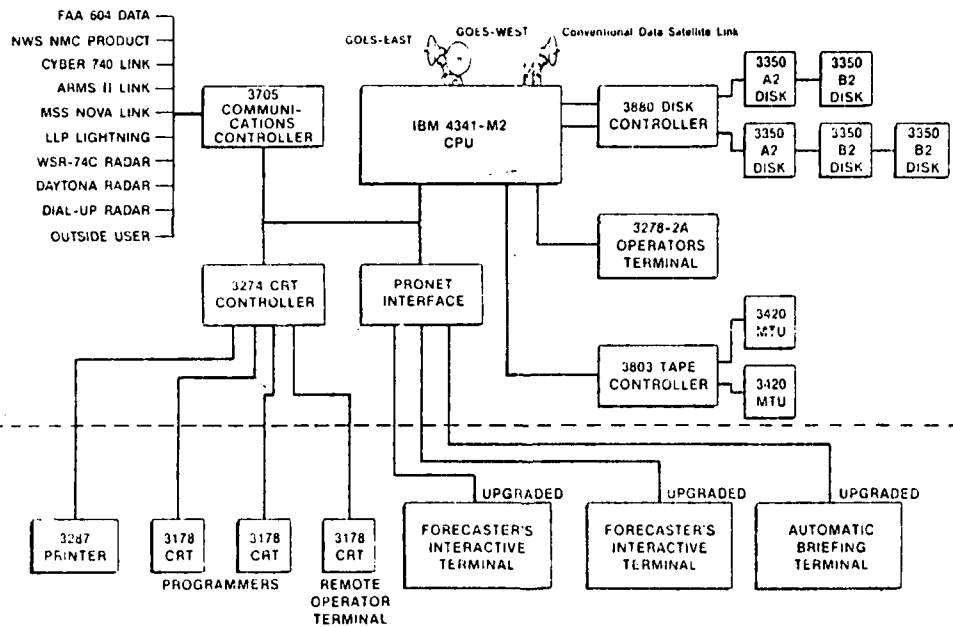


Fig. 3. MIDDS Computer Configuration.

unique events (e.g., Florida hourlyies are in, a radar image is complete, the satellite has finished scanning Florida, etc.) and trigger other programs which sideplay or analyze the data based on these events. The system scheduler repeatedly starts any kind of activity based on time. This powerful facility builds displays of various products and maintains them automatically without forecaster intervention. The other major category of support software is the user interface building sub-system. This set of programs allows the user to create or modify plain language menu templates which invoke commands and processes with single stroke action by the user.

The interactive workstation software controls the workstation, and provides instant access to the image and graphic displays stored in the workstation. Other workstation commands provide looping of graphics, images, or both; annotation of graphics; superposition of graphics on images; interactive gray scale modification; and functional compositing of two images (e.g., for temperature enhancements of the visible satellite images, or satellite and radar compositing).

The meteorological software provides extensive capabilities for the forecaster to create products of interest. While it is not possible to detail all of the possibilities, the forecaster is able to:

- 1) list or print selected hourly surface, special and radiosonde observations in North America,
- 2) plot maps and meteorograms of the surface observations and NMC MOS forecast products,
- 3) objectively interpolate observations to a uniform grid and then generate streamlines, plots or contours,
- 4) plot and contour derived meteorological parameters, such as divergence, vorticity, equivalent potential temperature, forecast products, etc.,
- 5) plot hodographs, meteorograms, and Skew-T and Stueve thermodynamic diagrams which include stability parameters for the radiosonde information,
- 6) overlay plots and contours of conventional and special data on various map projections including satellite and radar projections,
- 7) track clouds to derive cloud motions, and
- 8) earth locate any point on the satellite image and to grid the image (using the navigation information supplied in each image by NISDIS).

The image processing software provides image display, image enhancement in gray scale and frequency domains, multi-image combination products, and dynamic 3-D loops of the satellite images. Navigation of all images uses first principles navigation when possible and allows transformation from an image or graphic coordinate system to latitude, longitude

coordinates or weather station locations. The various meteorological data bases and imagery can be integrated for quantitative information using a tailored graphic or cursor image to point to the location of interest.

3. THE METEOROLOGICAL AND RANGE SAFETY SUPPORT (MARSS) SYSTEM

The MARSS system is a primary safety tool in use at the CCEP to support the ESMC and KSC in all operations involving toxic chemicals. It is interfaced with the ETR Cyber 740 which provides data from the WINDS. Other than data input, the MARSS is a stand-alone, microcomputer driven, color graphics display system. The hardware configuration for the system consists of a TEKTRONIX 4109 nineteen inch smart color graphics terminal, a 4170 Local Graphics Processor (microcomputer), and a 4695 ink-jet color copier. The ink-jet copier allows the user to obtain a full color hard-copy dump of any display entered.

The primary use of the MARSS is to forecast the path and concentration of toxic clouds in the event of a spill or leak of toxic chemicals. This requires that it contain a good representation of the local wind field; consequently the system provides several very beneficial side uses for wind and thunderstorm forecasting. The system is entirely menu driven, with on-line help displays for all system functions. Major display functions are: BARDS, DIFFUSION, FIELD, HELP, REED, D.C./PLOT, and COMM/EXIT.

3.1 Field Display

Using the tower data at any selected level, a wind field can be generated, as illustrated in Figure 4. (Note: actual display is in color.) MARSS uses the Barnes Objective Analysis technique (Barnes 1967, 1973), which is a successive correction algorithm with adjustable smoothing. The default parameters in the system for generating a wind field have been tuned to the CCAFS/KSC weather tower network. The vectors point in the direction that the wind is flowing. The length of the vector indicates the relative magnitude of the wind speed. The wind speed in knots of the largest vector displayed is indicated in the lower left of the map, above the date and time.




Fig. 4. Black and White representation of the local area wind field as displayed by the MARSS, FIELD function.

3.2 Dosage/Concentration (DC) and Diffusion Displays

The functions most frequently used are the BANDS, FIELD and TOWER. When required, the DC and Diffusion display functions provide the information required to assist ESMC and/or KSC safety staff on actions needed concerning hazardous spills or leaks of toxic chemicals.

Via the DC function, reference plots of downwind distance versus release rates for specified chemical species are available on an XY plot. The downwind distance is plotted along the X axis and the release rate along the Y axis. The corresponding spill pool size and spill volume are listed next to the release rate. The weather conditions and chemicals are listed above the graph. The Permissible Exposure Limit (PEL) concentration and the Emergency Exposure Limit (EEL) concentration levels are listed below the graph. The PEL curve is plotted in one color and the EEL curve is plotted in another color. The algorithm used to compute the downwind distance from the source to reach a specified concentration is the Ocean Breeze/Dry Gulch algorithm (Haugen, 1963). The name, Ocean Breeze/Dry Gulch, refers to the conditions under which actual test releases were performed during the early 1960's. These tests were held at the Cape Canaveral Air Force Station and Vandenberg Air Force Base to collect empirical data for algorithm development and verification.

The DIFFUSION function displays isopleths of four items, based on the wind field as discussed above. The four items displayed are:

- 1) a straight line forecast with a colored wedge outline, using only the wind measured (calculated) at the spill source. The width of the wedge is based on the standard deviation of

the horizontal wind direction. Four standard deviations are used to define the vertex,

- 2) a different color display of a similar wedge type area derived from computed winds at each grid point along the trajectory corridor,

- 3) within the wedged area, the PEL is displayed with a colored ellipse (it is generated assuming off-axis Gaussian diffusion), and

- 4) the fourth item displayed is the EEL within the PEL.

4. MODEL SUPPORT

The third area where an interactive system is currently in use is the area of rocket exhaust and blast focus special models to support Space Shuttle launches. These models are routinely run, with graphic displays of both input and output used to assist the forecaster in providing Range Safety operational support.

REEDM is the name of the model used to forecast the diffusion of the rocket exhaust ground cloud. The REEDM computer code includes basic mathematical expressions for atmospheric dispersion models, cloud-rise models and models for calculating the gravitational deposition of acid droplets from the exhaust cloud. In addition to tabular output, four input parameters (temperature, potential temperature, wind speed and wind direction) are graphically output for easy identification of atmospheric changes. Figure 5 illustrates the vertical graphic representation of those four items, as well as a two dimensional layering of the atmosphere computed by the model. Isopleths of ground level HCL deposition shown by the example in Figure 6 represents the primary output of the model. MARSS also has the ability to display this output in color (via function REED).

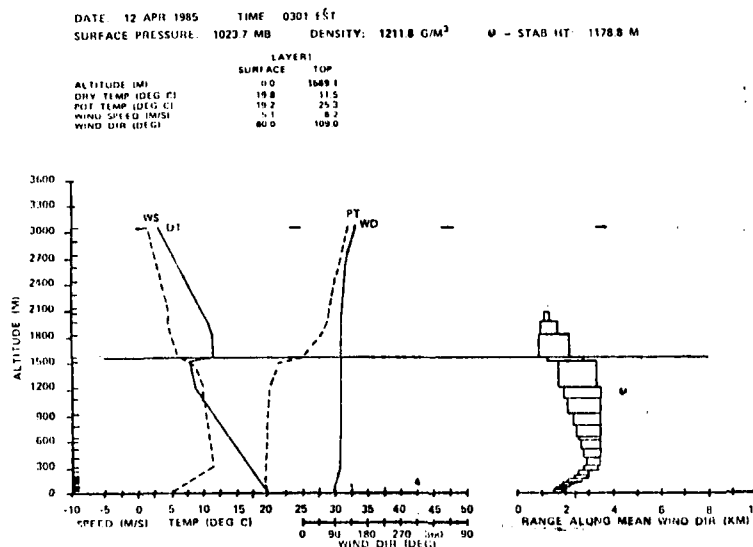


Fig. 5. Display of input fields to the REEDM (case illustrated is one for 12 Apr 85).

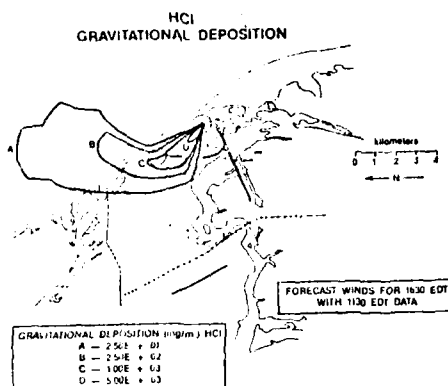


Fig. 6. REEDM ground level HCl deposition isopleths (case illustrated is one for 12 Jul 85).

The BLAST model evaluates inadvertent detonation hazards as a function of meteorological conditions. It is an interactive model, but currently all input and most output are in tabular format. One graphic used for rapid analysis is the change in the speed of sound with height as shown in Figure 7. Investigation is underway to better utilize graphics with this model.

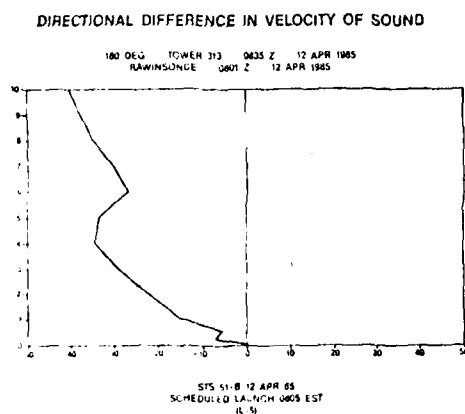


Fig. 7. Sample case (for 12 Apr 85) of directional difference in velocity of sound along the 180 degree azimuth as output by the BLAST model.

5. FUTURE PLANS

Improvements in both MIDDS and MARSS are under contract to the original developers: SSBC and ENSCO, Inc., respectively. At the time of the writing of this article, A. D. Little, Inc. has a contract with KSC for a "Weather Forecasting Expert Systems Evaluation and Feasibility". Pending results of this study, the possibility of including an Expert System would further involve interactive computers.

The Automated Weather Distribution System (AWDS) is under development by the Air Weather Service and when installed will add an additional system. The AWDS will provide five data types, as described by Ambros (1985):

- 1) alphanumeric, shipped from the Automatic Digital Weather Switch at Carswell AFB, Texas,
- 2) formatted Binary, derived at the Air Force Global Weather Central (AFGWC) by computer from raw (alphanumeric) data inputs,
- 3) uniform Gridded Data Fields provided by AFGWC from analysis and forecast model outputs,
- 4) Vector Graphics products, which are strings of points and instructions for displaying the points, and
- 5) Raster Products produced primarily from satellites.

6. SUMMARY

The Cape Canaveral Forecast Facility, which supports today's modern space program utilizes the state-of-the-art interactive weather systems through the combined efforts of NASA and the USAF.

7. REFERENCES

- AMBROS, D. S., (1985): Automated Weather Distribution System (AWDS) A Modernization of U.S. Air Force Weather Support, Preprints Second International Conference on the Aviation Weather System, Montreal, Amer. Meteor. Soc., 316-320.
- Barnes, S. L., (1964): A Technique for Maximizing Details in Numerical Weather Map Analysis, J. Appl. Meteor., 3, 396-409.
- Barnes, S. L., (1973): "Mesoscale Objective Map Analysis Using Weighted Time-Series Observations", NSSL Tech. Memo, NSSL-62, 60pp.
- Barrett, M., G. Dengel, and D. Wylie, (1985): The McIDAS Method for Integrating Data from many Diverse Sources, Preprints International Conference on Interactive Information and Processing Systems for Meteorology, Oceanography and Hydrology, Los Angeles, Amer. Meteor. Soc., 141-143.
- Bobowicz, T. J., (1985): The meteorological and Range Safety Support (MARSS) System, Preprints Conference on Aerospace and Range Meteorology, Huntsville, AL, Amer. Meteor. Soc., 90-96.

- 10913
- Boyd, B. F., J. E. Erickson, and T. M. Myers, (1985): Modernization of Weather Support to the Space Transportation System, Preprints Second International Conference on the Aviation Weather Systems, Montreal, Amer. Meteor. Soc., 233-237.
- Boyd, B. F. and C. R. Bowman, (1985): Diffusion Modeling in Support of the Space Shuttle (to be presented at the Joint Army-Navy-NASA-Air Force Safety and Environmental Protection Subcommittee Meeting, Monterey, CA, 4-8 Nov 85).
- Erickson, J. E., B. F. Boyd, and J. W. Oliver (1985): Meteorological Interactive Data Display System (MIDDS) Data Base, Preprints International Conference on Interactive Information and Processing Systems for Meteorology, Oceanography, and Hydrology, Los Angeles, Amer. Meteor. Soc., 173-175.
- Haugen, D. A. and J. H. Taylor, (1963): The Ocean Breeze and Dry Gulch Diffusion Programs, Volume II, AFCRL-83-791 (II), Air Force Cambridge Research Lab, Hanscom Field, MA, 100pp.
- Maier, M. W., L. G. Byerley, R. C. Binford, W. L. Hiscox, E. P. Krider, A. E. Pifer, and M. A. Uman, (1984): Gated Wide-Band Magnetic Direction-Finders for Locating Cloud-to-Ground Lightning, Preprints VII International Conference on Atmospheric Electricity, Albany, NY, 305-310.
- Myers, T. M., and B. F. Boyd, (1985): Status Report on the Applications of the Meteorological Interactive Data Display System to Space Shuttle and Range Support at the Kennedy Space Center and Cape Canaveral AFS, Preprints Conference on Aerospace and Range Meteorology, Huntsville, AL, Amer. Meteor. Soc., 73-80.
- Suomi, V. E., R. Fox, S. S. Limaye, and W. L. Smith, (1983): McIDAS III: A Modern Interactive Data Access and Analysis System, J. of Climate and Appl. Meteor., 22, 766-778.
- Young, J. T., C. Norton, R. Uram, R. Oehlken, R. Fox, D. Wade, T. Whittaker, J. Benson, and J. Ruden, (1985): The Meteorological Interactive Data Display System, Preprints Second International Conference on the Aviation Weather System, Montreal, Amer. Meteor. Soc., pp. 334-339.

END

FILMED

2-86

DTIC

END

FILMED

2-86

DTIC